


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.




REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	08/22/2023	BZHANG	GUTTADAURO

D

D


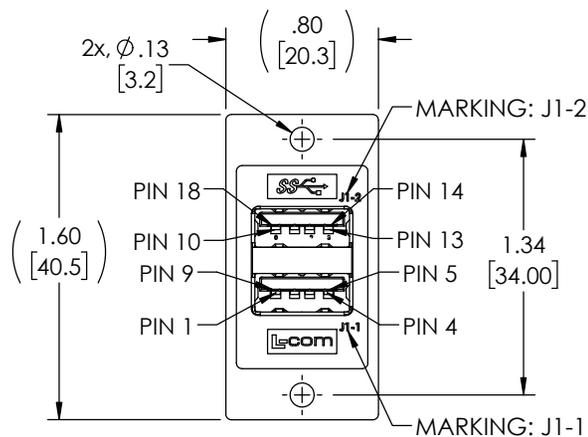


"J1"  
DOUBLE STACKED USB 3.0 TYPE "A"  
FEMALE CONNECTOR  
30u" GOLD PLATED CONTACTS  
NICKEL PLATED SHELL

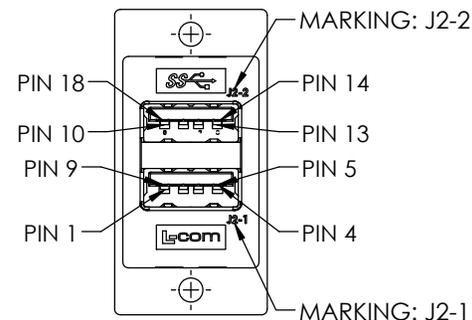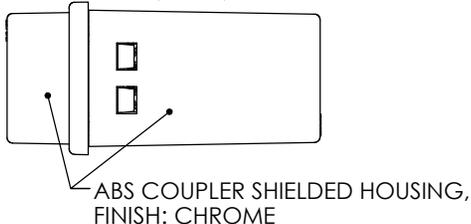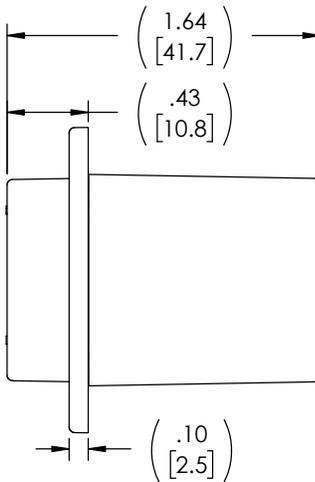

"J2"  
DOUBLE STACKED USB 3.0 TYPE "A"  
FEMALE CONNECTOR  
30u" GOLD PLATED CONTACTS  
NICKEL PLATED SHELL


"J1" WIRING MAP "J2"

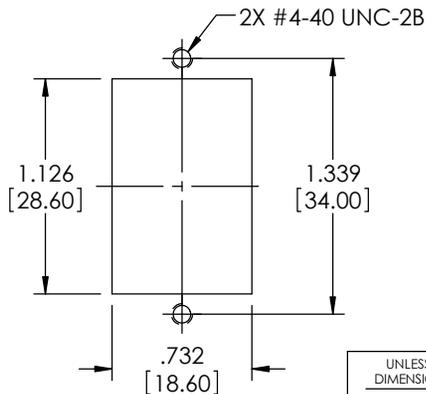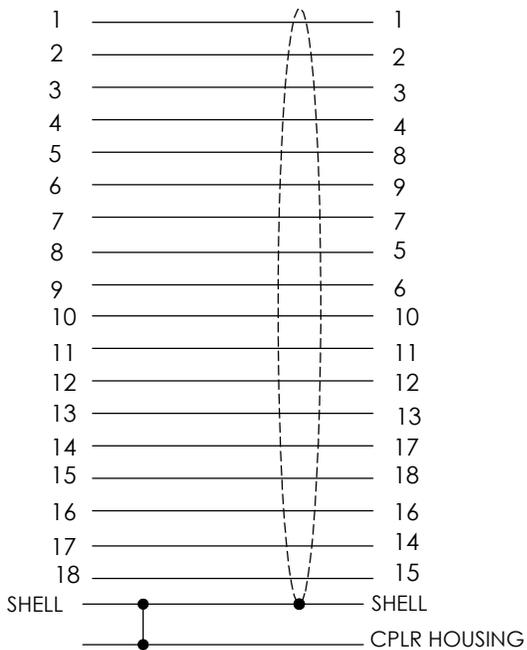

RECOMMENDED  
PANEL CUTOUT

**NOTES:**

- RATING:  
CURRENT: 1.8A (P1,P4,P10, P13 CONTACTS);  
0.25A(REMAINING CONTACTS)  
OPERATING TEMPERATURE: -10 °C TO +70 °C.
- COUPLER SHALL BE TESTED FOR CONTINUITY.
- COUPLER SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPEC PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [5]   ANGLES ± 1° .XXX = ± .005 [1.3]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	DRAWN BY B.ZHANG	01/21/2022	
THIRD-ANGLE PROJECTION 	CHECKED BY GUTTADAURO	01/21/2022	CATEGORY USB
	APPROVED BY GUTTADAURO	01/21/2022	PRODUCT DESCRIPTION ECF DOUBLE STACK CPLR, USB 3.0 AF-AF, SHLD
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		
	COLOR VARIATIONS MAY OCCUR		
	SIZE <b>A</b>	CAGE CODE <b>43321</b>	DWG. NO. ECF504-3DSAA-S
			REV. <b>A</b>
	SCALE: NONE	CAD FILE: ECF504-3DSAA-S.SLDDRW	SHEET 1 OF 1