


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|-----------------|------------|------------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 05/11/2023 | GUTTADAURO |
| | | | |
| | | | |

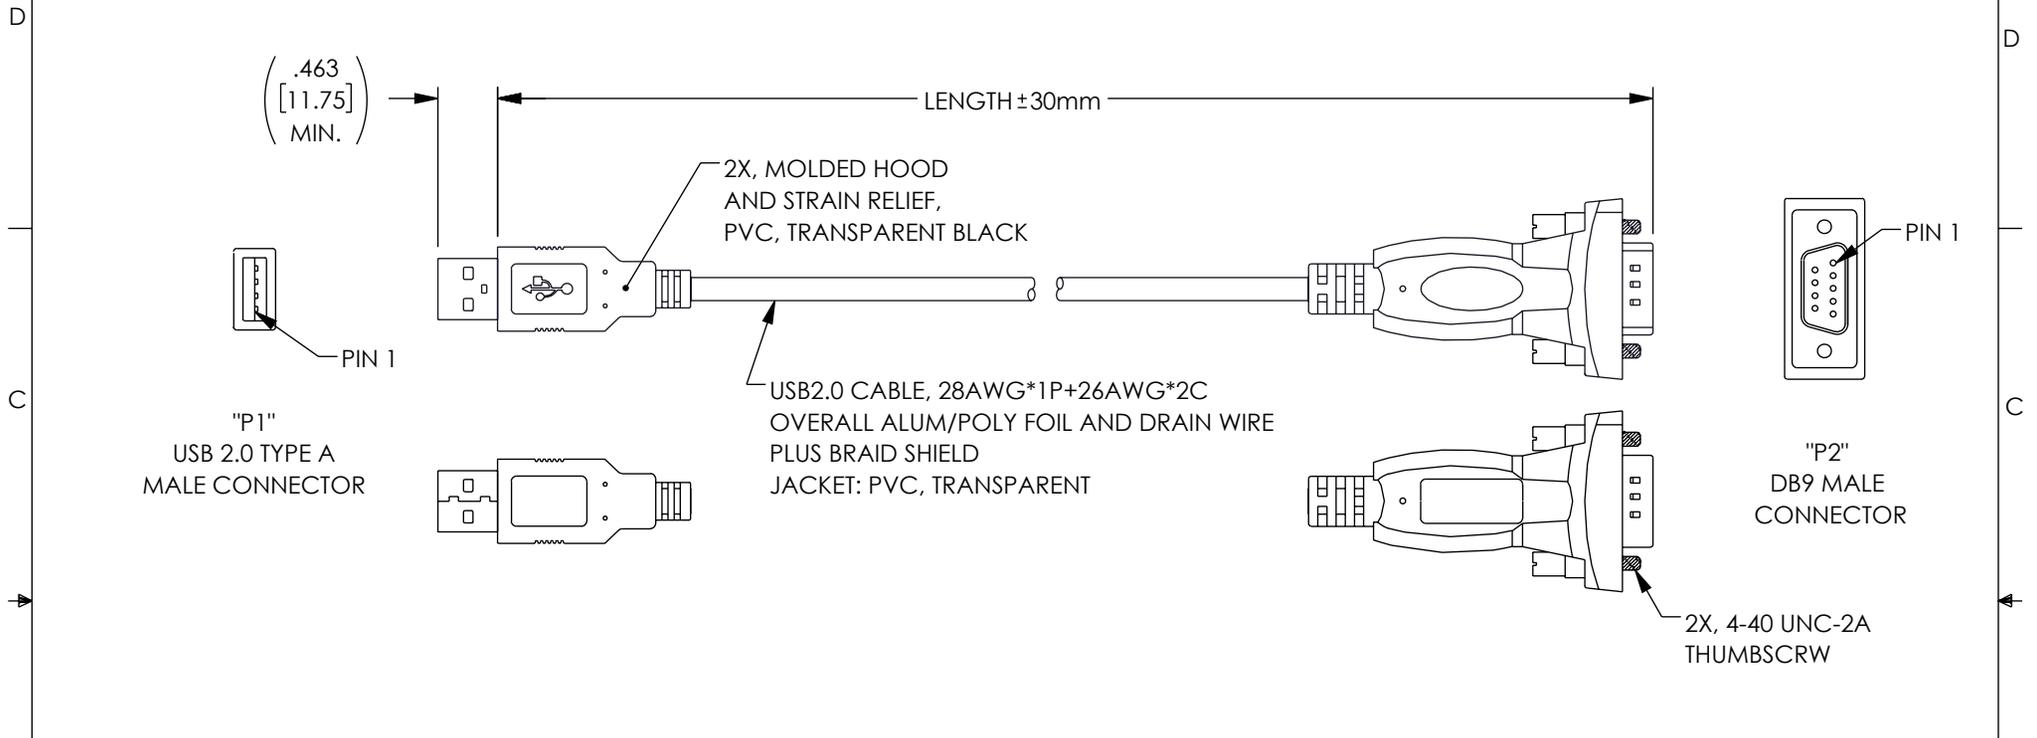


| PART NUMBER | LENGTH (MILLIMETER) |
|-------------------|---------------------|
| USB2.0-RS232-1M | 1000 |
| USB2.0-RS232-1.5M | 1500 |
| USB2.0-RS232-2M | 2000 |

FEATURES:

- USB 2.0 VERSION
- OVER 1Mbps DATA TRANSFER RATE.
- COMPATIBLE WITH WINDOWS, MAC, LINUX, ANDROID SYSTEM

PACKAGING:

CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

| | | | |
|--|--|---|---|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13] | APPROVALS SLI | DATE 04/18/2023 |  50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936 |
| | CHECKED BY GUTTADAURO | DATE 04/18/2023 | |
| THIRD-ANGLE PROJECTION  | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | PRODUCT DESCRIPTION USB TO RS232 CONVERTER CABLE | |
| COLOR VARIATIONS MAY OCCUR | SIZE A | CAGE CODE 43321 | DWG. NO. USB2.0-RS232 |
| SCALE: NONE | | CAD FILE: USB2.0-RS232.SLDDRW | |
| SHEET 1 OF 1 | | | REV. A |